



SS led ON with valid audio  
 SS led OFF with NO audio  
 SS led flashes if enabled and in an alarm condition


Pwr led ON if powered  
 Pwr led flashes if PF is enabled and in an alarm condition  
 Pwr led OFF during a valid DTMF tone  
 Pwr led OFF in voice record mode.

Hook led ON when in an off-hook condition

K1 led ON when K1 is closed or energized


K2 led ON when K2 is closed or energized

PGM led ON when programming the VAD-2 Plus

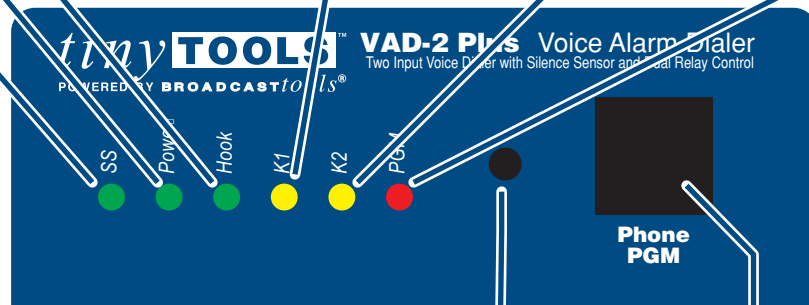

Recessed Program Switch

Voice/Program TT Telephone Receptacle

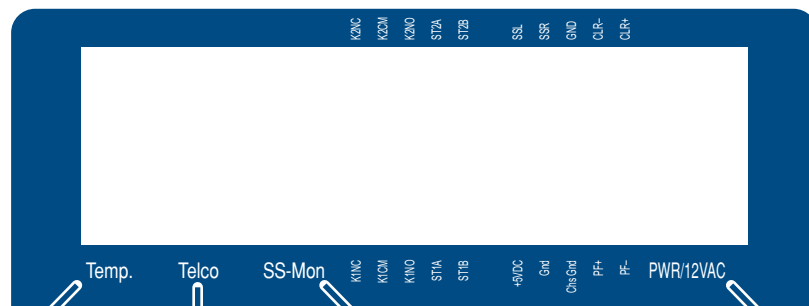

Optional Temp Probe

Telephone Line

Silence Sensor (send) audio to telco level trimmer

12 VAC wall transformer receptacle